

RX10RF Boiler Receiver

The SALUS RX10RF receiver is used as part of the SALUS Smart Home system as an external boiler switch or individual zone receiver.

The receiver can be used with the KL08RF wiring centre for underfloor systems or the TRV10RFM for radiator based systems or with a combination of both.

The RX10RF is compatible with most common boilers and can be used for volt free and 230V applications. An on board switch allows for simple manual override function if required.



Part Number	Description
RX10RF	Boiler Receiver

Features

Manual Mode switch for simple override

LED indicators

Can be used as boiler receiver or individual Zones receiver

Compatible with SALUS Smart home system Thermostats


Quick and simple to install

Technical Information

Supply:	230V AC 50Hz
Rating Max:	16 (5) A SPST
Input/Output:	0 - 230V
Communication:	ZigBee 2.4Ghz
Size (mm):	W-145 H-100 D-35

Installation Diagram

*Configured as RX1

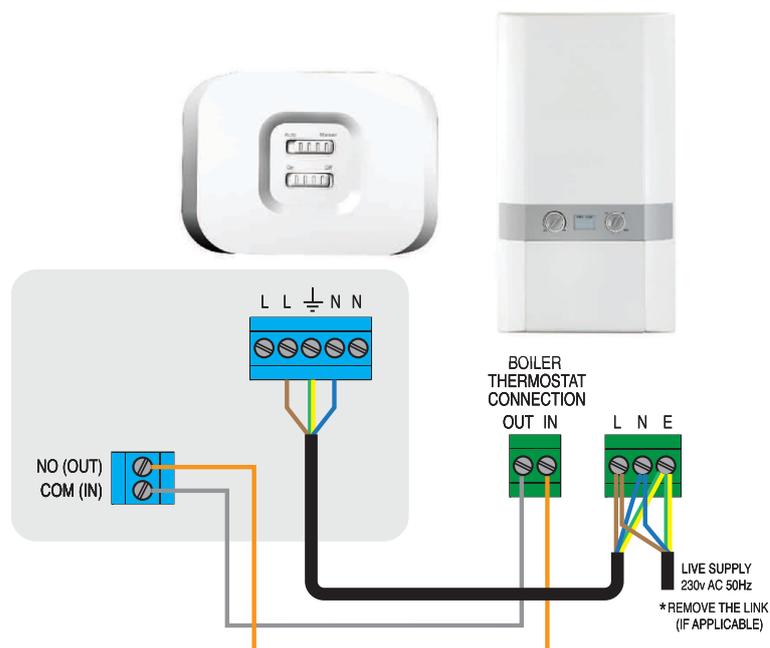

*Configured as RX2

